




Stationary Card Swipe Setup

1. Connect the designated Ethernet cable from your Apple Extreme Router or 8-Port switch into the Ethernet port on the back of the R212 communications terminal (**B**).
2. Connect the serial cable (**A**) from the card swipe into the serial port on the R212 dongle (**C**).
3. Plug the power adapter for the Card Swipe (**D**) into the dongle (**C**).
4. Plug the power adapter for the R212 (**E**) into the R212 Box.

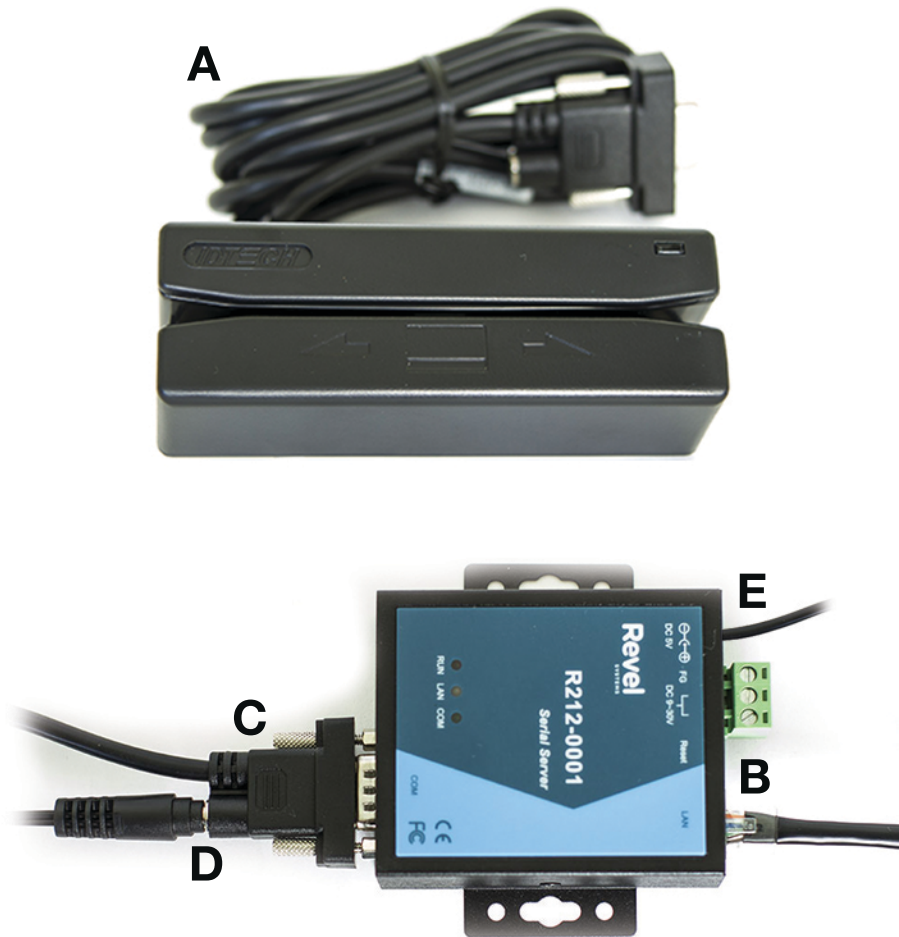

For mobile card swipes, plug directly into iPad.



Possible Card Swipe options